


# Hygienic Transfer Conveyor

Easy to clean and ideal for high care environments



Hygienic motor

Fully adjustable speed control

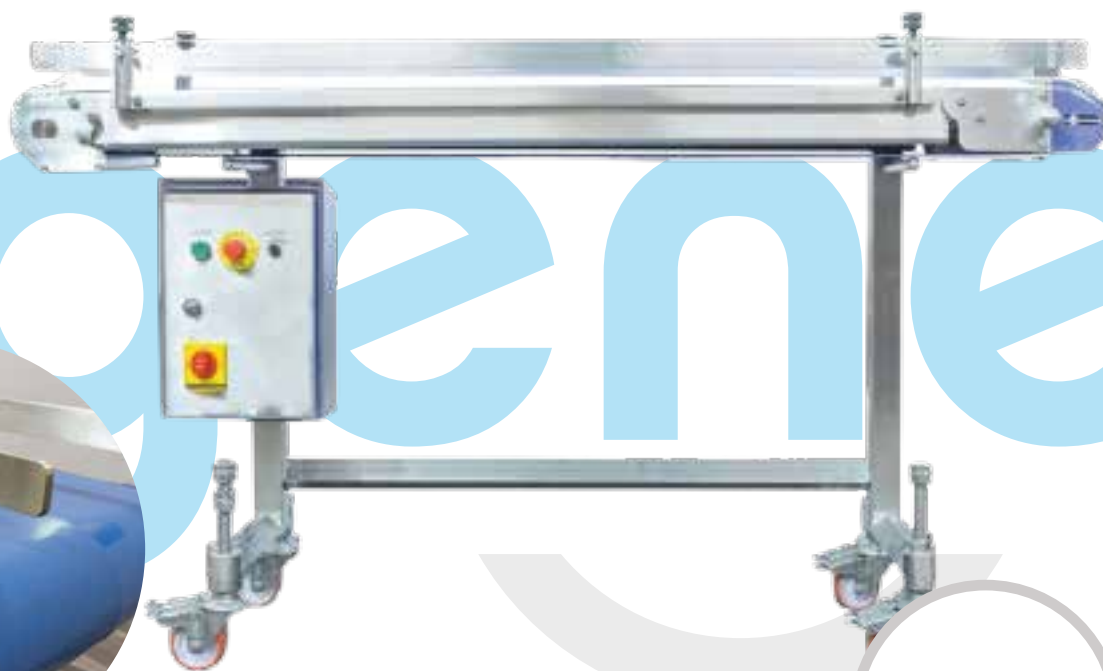

Removable door seal

Side rails used to implement accessories



# The most hygienic way to transfer produce



The Hygienic Transfer Conveyor is full with innovative features and excellent quality. Being a fully welder machine with a hygienic motorized drum and hygienic enclosure, the speed are completely controllable, and complete with product guides. The conveyor can be made bespoke to fit your requirements.

Hygiene has been considered at all time when designing this conveyor, making it easy to clean down and ideal for high care environments.

## DIMENSIONS

|        |              |        |              |
|--------|--------------|--------|--------------|
| Width  | 20.86 inches | Length | 50.59 inches |
| Height | 31.5 inches  | Weight | 150kg        |

## SPEED

Typically 10-300mm/second

## ELECTRICAL

|           |         |         |      |
|-----------|---------|---------|------|
| Supply    | 220V AC | Current | 16 A |
| Frequency | 50 Hz   |         |      |

## PNEUMATICS

|              |              |             |                          |
|--------------|--------------|-------------|--------------------------|
| Bar Pressure | 87 - 116 psi | Consumption | <1 cubic feet per minute |
|--------------|--------------|-------------|--------------------------|

## KEY FEATURES

- All debris is removed from the food contact area on each revolution of the belt, preventing build up and cross contamination
- Vacuum System - a unique vacuum system incorporating an air lock eliminates the need for pumps to dispose of water, making this the most reliable machine on the market
- The units are self-contained, portable and can be easily removed for maintenance and cleaning without interruption production
- Sanitized dosing - Available with an inbuilt dosing pump and brackets to mount 5L drums of sanitiser directly onto the machine
- The CIP unit does not disturb the path of the belt, so lines can be run with or without the unit fitted
- Fully integrated touch screen control

• Complete service contract available, typically 6 months full service, maintained by our experienced Service Technicians

• Emergency Call out Facility available

• Purchase spares from our Customer Service Team with ease. Most are shipped same day

• Training packages available to suit your business, carried out at both PDI stage and in situ

• 6 Month Warranty

Within our service



[www.igeneusa.com](http://www.igeneusa.com) +1 916 412 6676